

## **The PLASCO Line of Paint, Varnish and Enamel Products »**

### **PLASCO FLAT WALL PAINT**

A durable, soft sheen, washable wall paint for plaster, wallboard or composition walls and ceilings.

### **PLASCO FLOOR PAINT**

For all types of interior floors and woodwork — quick drying — economical.

### **PLASCO READY MIXED PAINT**

Of good quality for general exterior painting.

### **PLASCO SEMI-GLOSS ENAMEL**

A durable, washable low gloss enamel for kitchen, hall and bathroom walls and ceilings.

### **PLASCO UTILITY ENAMEL**

For furniture, woodwork, toys, farm implements — in fact, for all general purposes.

### **PLASCO VARNISH AND ENAMEL**

A complete line of medium priced varnishes for all general purposes.

### **PLASCO VARNISH STAINS**

To renew furniture and woodwork — stains and varnishes in one operation.

# PLASCO

REG. U. S. PAT. OFF.

**FLAT  
WALL  
PAINT**



**PITTSBURGH  
PLATE GLASS COMPANY  
PAINT-VARNISH-LACQUER**

**E. J. White Paint & Glass Co.  
123 St. Paul St.-Tel. 1652  
Burlington, Vt.**

# PLASCO FLAT WALL PAINT

## DIRECTIONS

STIR PAINT THOROUGHLY FROM  
THE BOTTOM.

**PREPARATION OF SURFACE:** Wash or scrape off all calcimine, loose paint, grease, and dirt. Fill cracks with a stiff paste made from Plasco Flat Wall Paint and Plaster of Paris. Touch up patch spots when dry with material used for first coat.

One coat of Plasco Flat Wall Paint of selected color may be sufficient over old paint in good condition where color difference is slight, in which case apply as it comes in the can or reduce slightly with Leptyne or Turpentine.

The most satisfactory results will be obtained from the following two-coat system on either new or previously painted surfaces:



2  
IVORY



3  
ORCHID




4  
PEARL GRAY



5  
CORAL



6  
BUFF

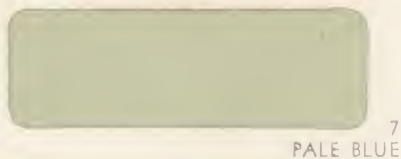

7  
PALE BLUE



8  
TAN



9  
NILE GREEN

ALSO WHITE AND PRIMER SEALER.

**FIRST COAT**—For best results use Plasco Primer Sealer. Thin one gallon of Plasco Primer Sealer with one pint of Leptyne or Turpentine and add one quart of Plasco Flat Wall Paint of color selected for finish coat. Oil Colors may be used for tinting.

As an alternate, for first coat add one quart of boiled linseed oil and one pint of Leptyne or Turpentine to a gallon of Plasco Flat Wall Paint. Wall must present an even sheen before finish coat is applied. If dull spots appear, they should be touched up with a first coat mixture before finish coat is applied.

**FIRST COAT FOR WALLBOARD AND ACOUSTICAL BOARD:** Reduce one gallon of Plasco Primer Sealer with not to exceed one quart of Leptyne or Turpentine. Brush on a uniform coat.

Allow Plasco Primer Sealer or First Coat mixture overnight for drying.

**FINISH COAT:** Use Plasco Flat Wall Paint as it comes in the can or reduce slightly with Leptyne or Turpentine.

(REV. 8/16/32)

Successful Painting requires the use of a proper brush.  
Use a Gold Stripe Brush.